



Simply


110/230 Vac
24 Vdc


100% Produced in Italy




 **Simply** è un attuatore lineare elettromeccanico per l'apertura di ante battenti residenziali
max 4 m / anta

 **Simply** is an electromechanical operator for opening residential swing gate
max 4 m / leaf

 **Simply** es un accionador electromecánico para abrir puertas de hojas de uso residencial
max 4 m / hoja


 **Simply** est un opérateur linéaire électromécanique pour automatisation de vantaux battants d'un usage résidentiel
max 4 m / vantail

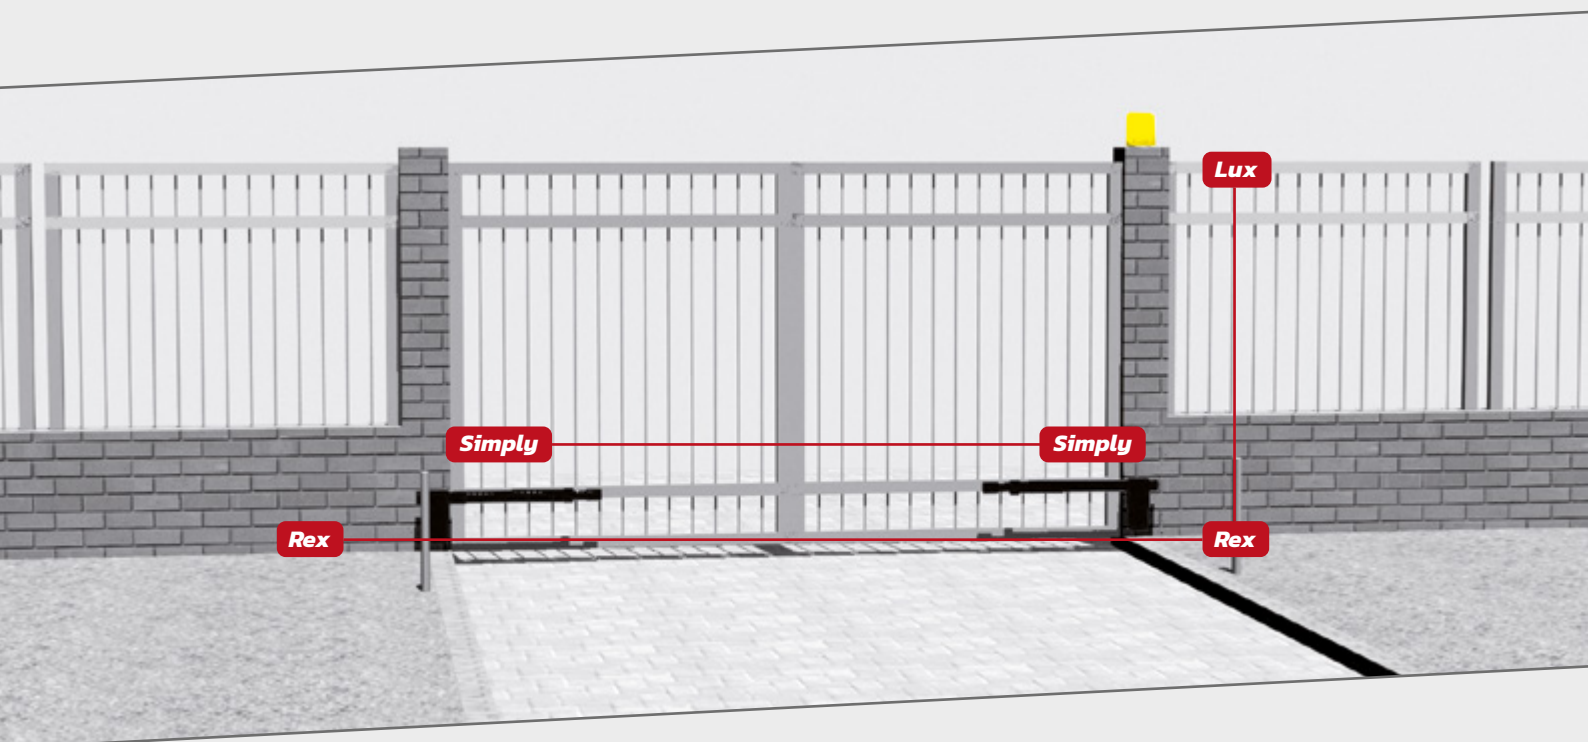

Battente / Swing / Batiente / Battant

DPlus
AUTOMATION SYSTEMS

DATI TECNICI / TECHNICAL DATA	<i>Simply 40-SX/DX</i>	<i>Simply 60-SX/DX</i>	<i>Simply 40-24-SX/DX</i>
ALIMENTAZIONE GENERALE / MAIN POWER SUPPLY	110/230 Vac	110/230 Vac	110/230 Vac
ALIMENTAZIONE / MOTOR POWER SUPPLY	110/230 Vac 50/60 Hz	110/230 Vac 50/60 Hz	24 Vdc
TEMPERATURA DI ESERCIZIO / OPERATING TEMPERATURE	-20° +55°	-20° +55°	-20° +55°
DIMENSIONI MAX ANTA / MAXIMUM GATE LENGTH	-	VEDERE GRAFICO / SEE GRAPH	-
SPINTA / TORQUE FORCE	1600 N	1600 N	1400 N
POTENZA / RATED POWER	300 W	320 W	74 W
ASSORBIMENTO / ABSORBED POWER	1,8 A	1,8 A	3,0 A
CONDENSATORE / CAPACITOR	8 µF	8 µF	-
CICLI DI LAVORO / CYCLES PER HOUR	50 %	40 %	80 %
CORSA / USABLE STROKE	400 MM	600 MM	400 MM
GRADO IP / IP	54	54	54
PESO MOTORE / WEIGHT	5,8 KG	6,0 KG	6,0 KG
TEMPO DI APERTURA / OPENING TIME	19 SEC	25 SEC	17 SEC
LUBRIFICAZIONE / LUBRIFICATION	Grasso / Grease	Grasso / Grease	Grasso / Grease

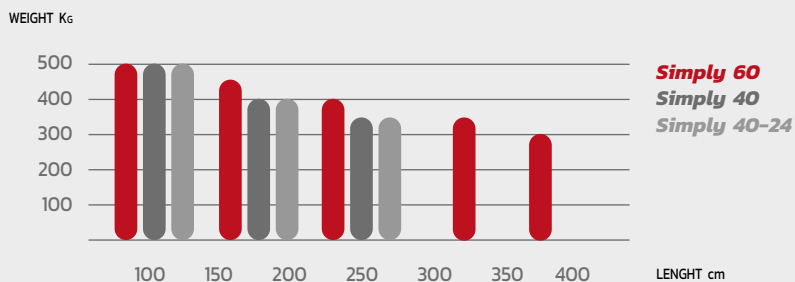

- Dimensioni massime dell'anta rispetto al peso dei cancelli azionabili della gamma **Simply**.
- Maximum leaf dimensions for **Simply** operators.
- Tamaño máximo de la hoja accionable por los motores de la gama **Simply**.
- Dimensions maximum du vantail pour les opérateurs **Simply**.

