




# Sub 110/230 Vac 24 Vdc


100% Produced in Italy




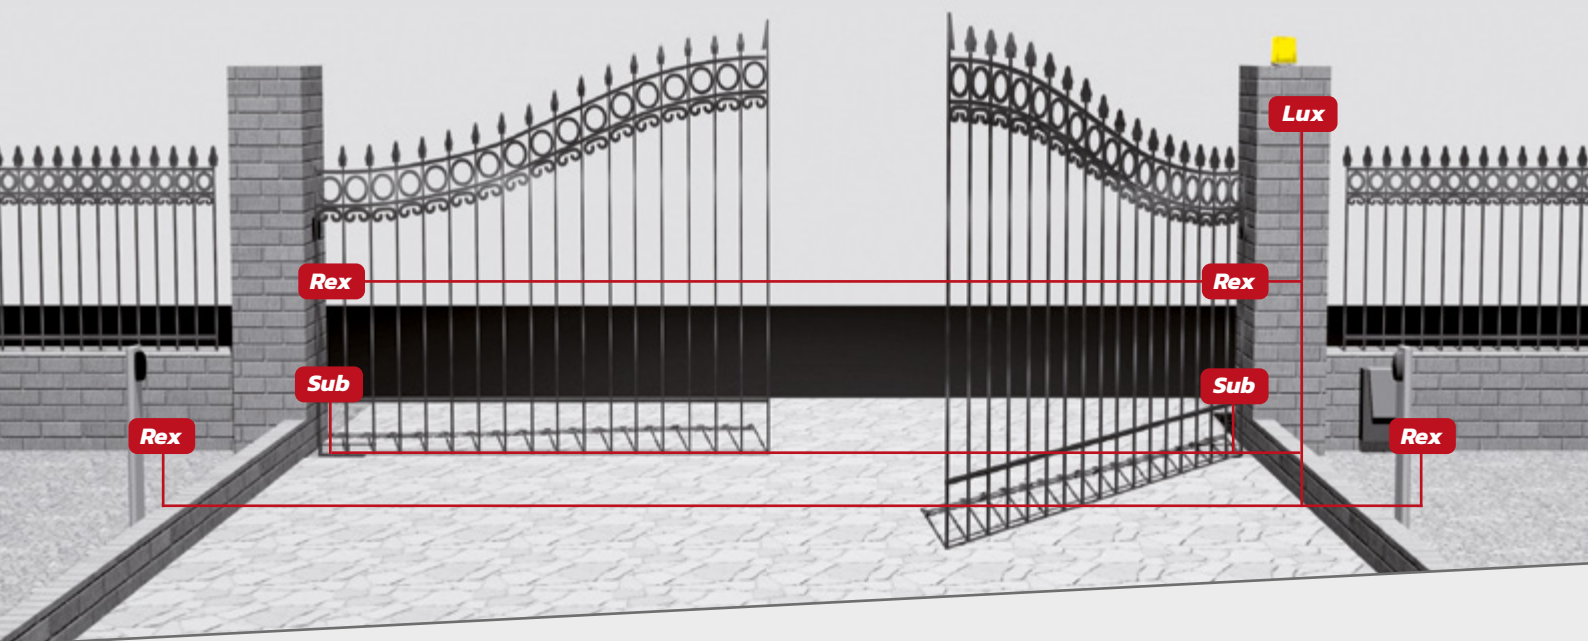
 **Sub** è un operatore elettromeccanico interrato per cancelli ad ante battenti max 3,5m / anta

 **Sub** is an underground electromechanical operator for swing gates max 3,5m / leaf

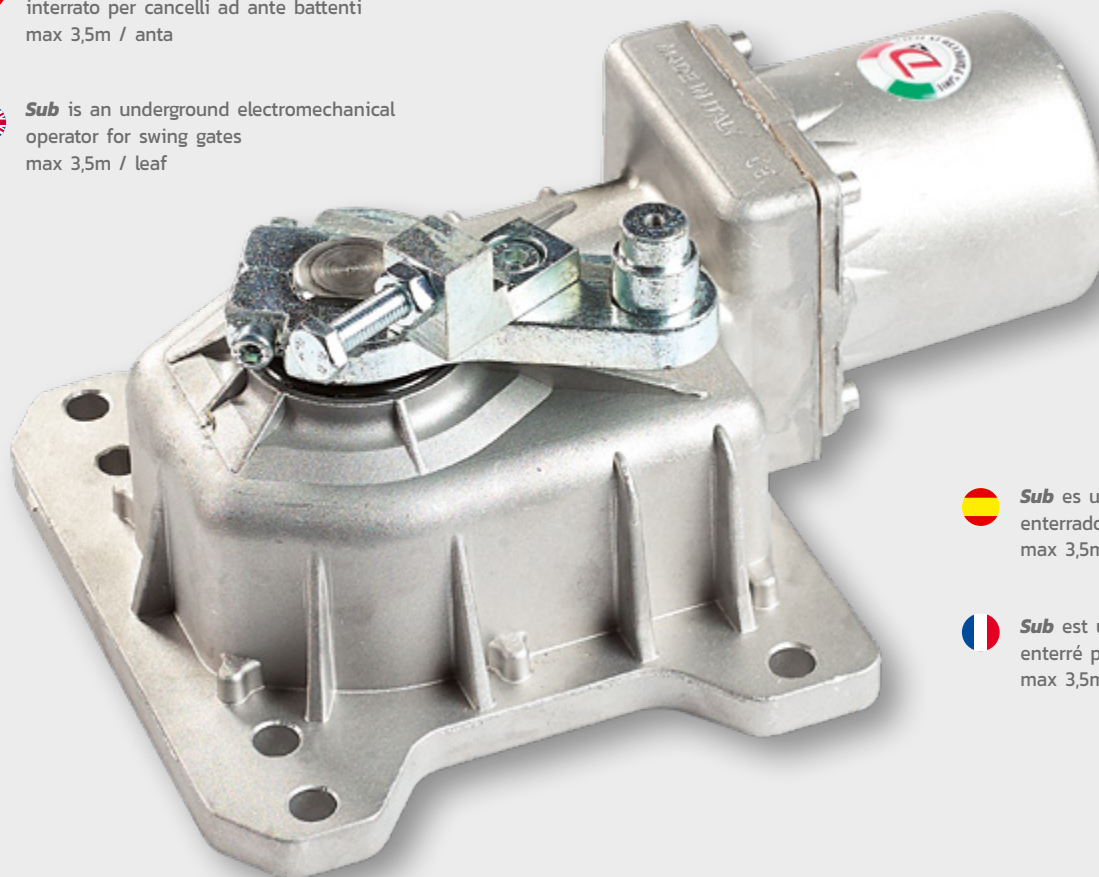

 **Sub** es un operador electromecánico enterrado para puertas de hojas max 3,5m / hoja

 **Sub** est un opérateur électromécanique enterré pour portails battants max 3,5m / vantail




Battente / Swing / Batiente / Battant

**DPlus**  
AUTOMATION SYSTEMS

**DATI TECNICI / TECHNICAL DATA**
**Sub**
**Sub 24**

ALIMENTAZIONE GENERALE / MAIN POWER SUPPLY	110/230 Vac	110/230 Vac
ALIMENTAZIONE / MOTOR POWER SUPPLY	230 Vac 50/60 Hz	24 Vdc
TEMPERATURA DI ESERCIZIO / OPERATING TEMPERATURE	-20° +55°	-20° +55°
DIMENSIONI MAX ANTA / MAXIMUM GATE LENGTH	VEDERE GRAFICO / SEE GRAPH	3,5 M
SPINTA / TORQUE FORCE	250 NM	250 NM
POTENZA / RATED POWER	280 W	50 W
ASSORBIMENTO / ABSORBED POWER	1,4 A	3 A
CONDENSATORE / CAPACITOR	12,5 µF	
RPM / RPM	1400	1800
GRADO IP / IP	67	67
PESO MOTORE / WEIGHT	10 KG	10 KG
LUBRIFICAZIONE / LUBRIFICATION	Grasso / Grease	Grasso / Grease

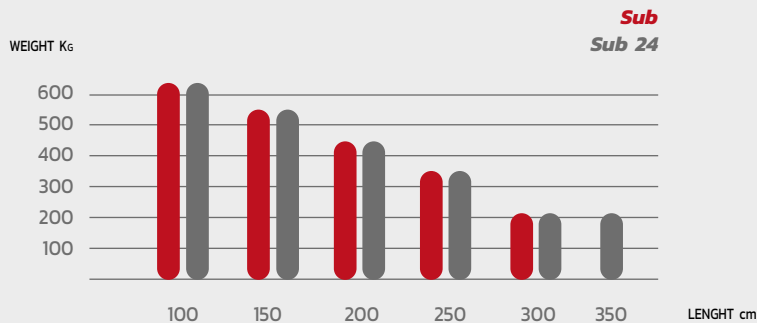

- Dimensioni massime dell'anta rispetto al peso dei cancelli azionabili della gamma **Sub**.
- Maximum leaf dimensions for **Sub** operators.
- Tamaño máximo de la hoja accionable por los motores de la gama **Sub**.
- Dimensions maximum du vantail pour les opérateurs **Sub**.

